TECHNICAL DATA

870601NW

APOLO OUTDOOR WALL LIGHT 6W 4000K

APOLO wall light, surface-mounted with adjustable light source. Suitable for outdoor use with a protection rating of IP54. Power of 6W and luminous flux of 354lm. Indirect lighting with a symmetrical 120° optical beam angle and color temperature of 4000K. Mechanical impact resistance rating IK08. Housing made of aluminum with black finish and opal polycarbonate diffuser.

PRODUCT SPECIFICATIONS

Item code:	870601NW
Description:	APOLO outdoor wall light
EAN13 code:	8436568448190

ELECTRICAL DATA

Power:	6w
Voltage:	220-240vac
Frequency:	50-60 Hz
Power factor:	0,6
Dimmable:	NOT
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	4000K
Luminous efficiency:	59 lm/w
Lumens:	354lm
LED chip model:	SMD 2835
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>80
Color rendering index (Minimum value):	80
Color rendering index (Maximum value):	83
Standard desviation of colour matching:	<6
Luminous maintenance factor:	L90B10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4

TECHNICAL DATA

Protection rating:	**IP54 (Equipment protected against dust and water splashes)**
Impact rating:	**IK08 (5J)**
Operating temperature:	**-20°~50°**
Mounting type:	**Surface**

AVERAGE LIFESPAN

Working hours:	**30000 hrs**
Switching cycles:	**25000 ON/OFF**

PHYSICAL DATA

Housing

Material:	**Aluminum**
Finish:	**Black**

Diffuser

Material:	**Polycarbonate**
Finish:	**Opal**

Weight

Weight:	**0,65 kg**

ENERGY EFFICIENCY 2023(UE-2019/2015) F

DIMENSIONS

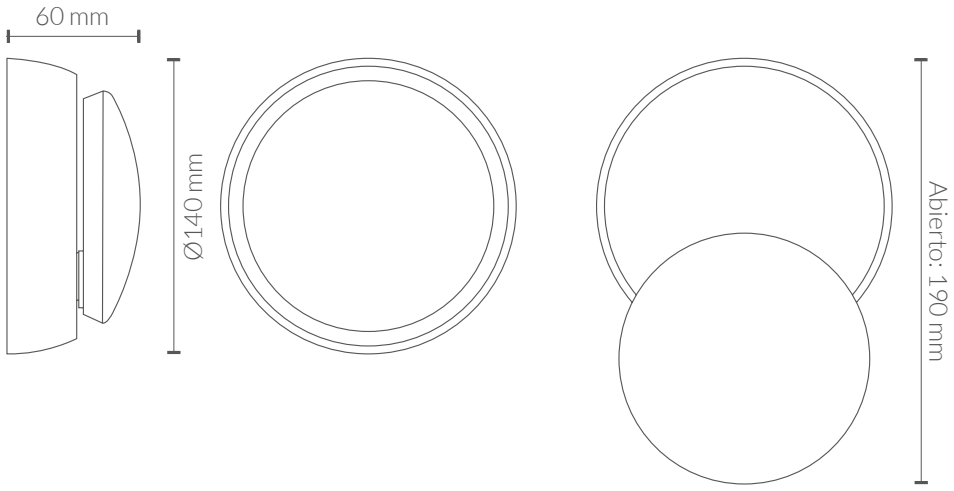

CERTIFICATIONS

CE & ROHS

EMC directive 2014/30/EU ELECTROMAGNETIC COMPATIBILIT

EN IEC 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN IEC 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current =16 A per phase).
EN 61000-3-3	Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltaje changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current <= 16 A per phase and not subject to conditional connection.
EN 61547	Equipment for general lighting purposes - EMC immunity requirements.

LVD Directive 2014/35/EU LOW VOLTAGE

EN IEC 60598-1	Luminaires - Part 1: General requirements and tests.
EN IEC 60598-2-1	Luminaires - Part 2-1: Particular requirements - Fixed general purpose luminaires

RoHS Directive 2011/65/EU and Delegated Directive (EU) 2015/863
Determination of certain substances in electrotechnical products.

IEC 62321-1	**IEC 62321-3-1**
EN 62321-4-1	**EN 62321-5**
EN 62321-6	**EN 62321-7-1**
EN 62321-7-2	**EN 62321-8**

CE RoHS