TECHNICAL DATA

9620001NW

MAX UFO LED HIGH BAY LIGHT 200W 4000K 90º

MAX UFO LED industrial high bay light, 200W power and 29600lm luminous flux. Equipped with 226 pcs Lumileds LED chips and Mean Well driver HBG-200DA, with 6kV surge protection. Symmetrical 90º beam angle and 4000K colour temperature. Protection rating IP65 and mechanical impact resistance rating IK08. Black aluminium body and transparent polycarbonate diffuser.

110V 240V
MULTITENSIÓN

PRODUCT SPECIFICATIONS

Item code:	**9620001NW**
Description:	**LED industrial high bay light**
EAN13 code:	**8436568444246**

ELECTRICAL DATA

Power:	**200W**
Voltage:	**90-305vac**
Frequency:	**50-60Hz**
Power factor:	**0,9**
Dimmable:	**NOT**
Driver Protection:	**OVP, SCP, OPP, OTP**
Overvoltage protection:	**6kv**
Electrical insulation class:	**CLASS I**
Connection:	**L/N+TT**

LUMINOUS DATA

Color temperature:	**4000K**
Luminous efficiency:	**148lm/w**
Lumens:	**29600lm**
LED chip brand:	**Lumileds**
LED chip model:	**Luxeon 3030 2d**
Number of LED chips:	**226pcs**
Beam angle:	**90º**
Luminous distribution:	**Symmetrical**
Color rendering index:	**>80**
Color rendering index, minimum:	**80**
Color rendering index, maximum:	**85**
Standard desviation of colour matching:	**<6**

Luminous flux maintenance:	**L90D10**
Flicker index:	**≤1,0**
SVM (Stroboscopic Visibility Measure):	**≤0,4**
Flicker free:	**YES**

TECHNICAL DATA

Protection rating:	**IP65 (Dust-tight and protected against water jets)**
Impact rating:	**IK08 (5J)**
Operating temperature:	**-20°~50°**
Mounting type:	**Surface**

AVERAGE LIFESPAN

Working hours:	**55000 hrs**
Switching cycles:	**40000 ON/OFF**

PHYSICAL DATA

Housing

Material:	**Aluminum**
Finish:	**Black**

Diffuser

Material:	**Polycarbonate**
Finish:	**Transparent**

Weight

Weight:	**5,00 kg**

ENERGY EFFICIENCY 2023(UE-2019/2015) F

DIMENSIONS

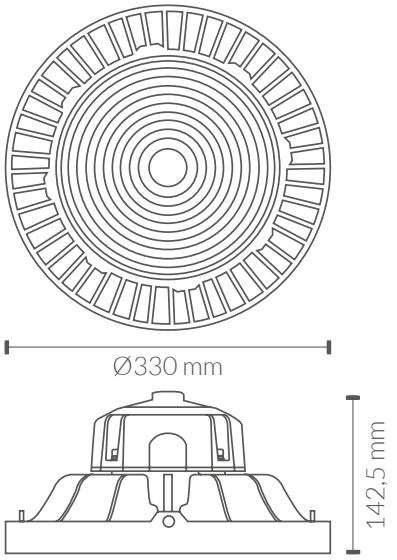

LUMINOUS INTENSITY DISTRIBUTION CURVE

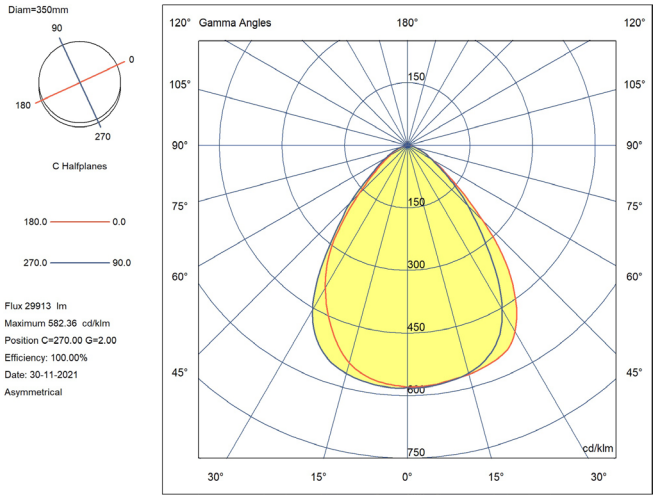

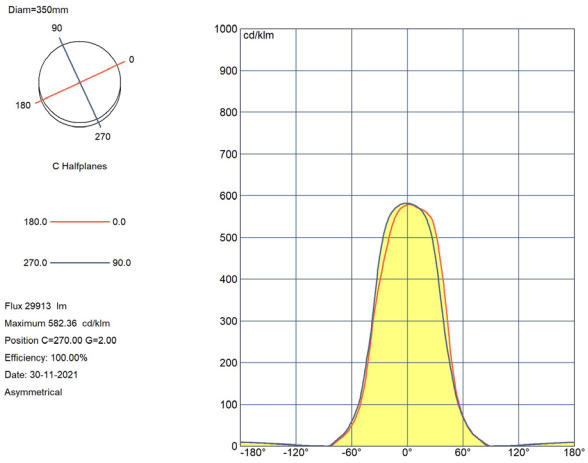

CERTIFICATIONS

CE & ROHS

EMC directive 2014/30/EU ELECTROMAGNETIC COMPATIBILIT

EN IEC 55015	Limits and methods of measurement of radio-frequency disturbance characteristics of lighting equipment and similar apparatus.
EN 61547	Lighting equipment for general use. EMC immunity requirements.
EN IEC 61000-3-2	Electromagnetic compatibility (EMC). Part 3-2: Limits. Limits for harmonic current emissions (equipment with input current ≤ 16 A per phase).
EN 61000-3-3	Electromagnetic compatibility (EMC). Part 3-3: Limits. Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.

LVD directive 2014/35/EU LOW VOLTAGE

EN 60598-1	Luminaires - Part 1: General requirements and tests.
EN 60598-2-1	Luminaires - Part 2-1: Particular requirements - Fixed general purpose luminaires.

RoHS Directive 2011/65/EU and Delegated Directive (EU) 2015/863
Determination of Certain Substances in Electrotechnical Products.

IEC 62321-4 **IEC 62321-5**

IIEC 62321-7 **IEC 62321-6**

IEC 62321-8

CE RoHS