TECHNICAL DATA

332006SECCT

LED CEILING LIGHT WITH SENSOR AND EMERGENCY KIT 20W CCT

LED ceiling light with Merrytek microwave sensor and emergency kit. 20W power and 2200lm luminous flux. 120° symmetrical optical opening and 3 selectable colour temperatures via DIP switch. IP20 protection rating against external elements and IK06 mechanical impact resistance rating. White finish metal base and opal PMMA diffuser.

PRODUCT SPECIFICATIONS

Item code:	332006SECCT
Description:	Indoor LED ceiling light with motion sensor and emergency kit
EAN13 code:	8435724907908

ELECTRICAL DATA

Power:	20w
Voltage:	170-265vac
Frequency:	50/60 Hz
Power factor:	0,7
Dimmable:	NOT
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	CCT Selectable 5700K/4000K/3000K
Luminous efficiency:	110 lm/w
Lumens:	2200lm
LED chip brand:	San'an
LED chip model:	SMD 2835
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>80
Standard desviation of colour matching:	<6
Luminous maintenance factor:	L95B10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4

MOTION SENSOR DATA

Sensor brand:	**Merrytek**
Sensor type:	**Microondas**
Work mode:	**Function ON/OFF**
Configuration options:	**YES**
Tiempo de encendido:	**5sg, 30sg, 90sg, 3min, 20min, 30min**
Light sensor:	**2lux, 10lux, 25lux, 50lux, disabled**
Detection area:	**100%, 75%, 50%, 25%, 10%**
Detection angle:	**120°**
Detection range:	**4-6mts**
Mounting height:	**Maximun 3 mts**

EMERGENCY KIT DATA

Power:	**3W**
Luminance:	**200lm**
Autonomy:	**90 minutes**
Function:	**Não permanente**
Battery:	**Ni-Cd 3.7v/2.2Ah**

TECHNICAL DATA

Protection rating:	**IP20 (Equipment protected against objects >12mm in diameter)**
Impact rating:	**IK06 (1J)**
Operating temperature:	**-20°~50°**
Mounting type:	**Surface**

AVERAGE LIFESPAN

Working hours:	**35000 hrs**
Switch cycles:	**25000 ON/OFF**

PHYSICAL DATA

Housing

Material:	**Metal**
Finish:	**White**

Diffuser

Material:	**PMMA**
Finish:	**Opal**

Weight

Weight:	**0,67 kg**

ENERGY EFFICIENCY 2023(UE-2019/2015) E

DIMENSIONS

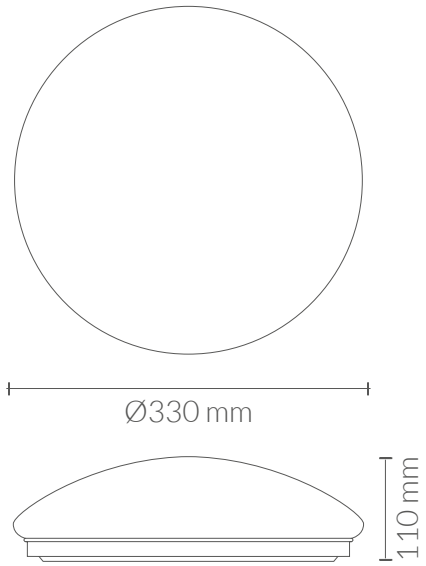

LUMINOUS INTENSITY DISTRIBUTION CURVE

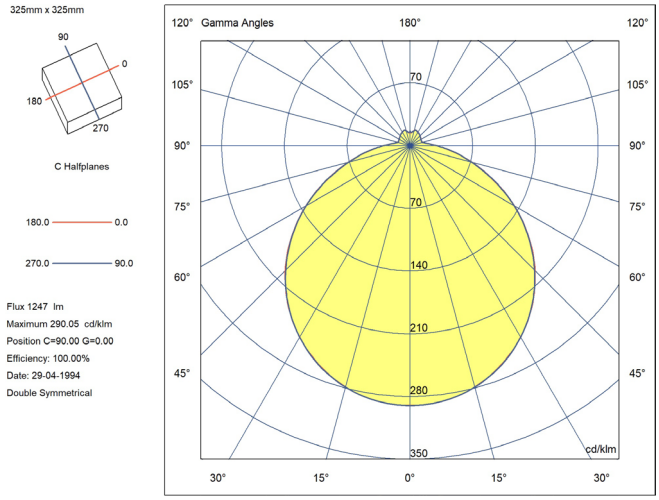

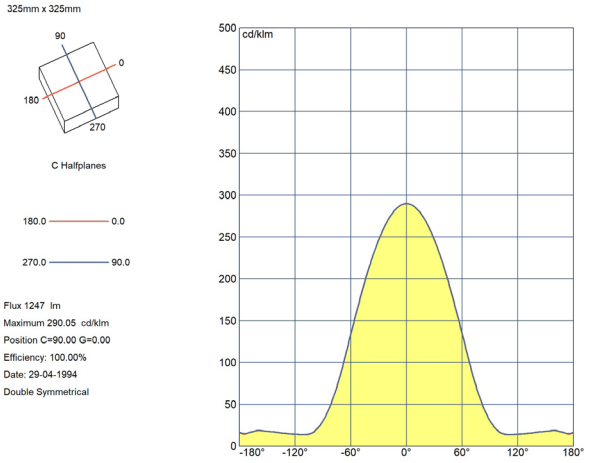

CERTIFICATIONS

CE & ROHS

EMC directive 2014/30/EU ELECTROMAGNETIC COMPATIBILIT

EN IEC 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61547	Equipment for general lighting purposes - EMC immunity requirements.
EN IEC 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current =16 A per phase).
EN 61000-3-3	Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current <= 16 A per phase and not subject to conditional connection.

LVD directive 2014/35/EU LOW VOLTAGE

EN 60598-2-22	Luminaires - Part 2-22: Particular requirements - Luminaires for emergency lighting
EN 60598-1	Luminaires - Part 1: General requirements and tests.
EN 62471	Photobiological safety of lamps and lamp systems
EN 62493	Assessment of lighting equipment related to human exposure to electromagnetic fields
EN IEC 62031	LED modules for general lighting - Safety specifications
EN 61347-2-13	Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 61347-2-7	Lamp controlgear -- Part 2-7: Particular requirements for battery supplied electronic controlgear for emergency lighting (self-contained)
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements

RoHS Directive 2011/65/EU and Delegated Directive (EU) 2015/863
Determination of Certain Substances in Electrotechnical Products.

IEC 62321-2-1	**IEC 62321-5**
IEC 62321-4	**IEC62321-6**
IEC 62321-7-1	**IEC 62321-7-2**

CE RoHS