TECHNICAL DATA

551030NW

KADO LED FLOODLIGHT 10W 4000K

KADO LED floodlight for outdoor use, 10W power and luminous flux of 1180lm. Equipped with 12 LUMILEDS LED Chips, and Linear Driver with 2Kv surge protection. 90° symmetrical optical beam angle and 4000K color temperature. IP65 protection rating against external elements and IK09 mechanical impact resistance rating. Body made of grey finish aluminum and transparent polycarbonate lens.

PRODUCT SPECIFICATIONS

Item code:	**551030NW**
Description:	**LED floodlight for outdoor use**
EAN13 code:	**8435724902910**

ELECTRICAL DATA

Power:	**10w**
Voltage:	**185-265vac**
Frequency:	**50-60 Hz**
Power factor:	**0,9**
Driver model:	**Lineal Driver**
Overvoltage protection:	**2 Kv**
Dimmable:	**NOT**
Electrical insulation class:	**CLASS I**
Connection:	**L/N+TT**

LUMINOUS DATA

Color temperature:	**4000K**
Luminous efficiency:	**118lm/w**
Lumens:	**1180lm**
LED chip brand:	**LUMILEDS**
LED chip model:	**SMD 2835**
N.° LED chip:	**12 pcs**
Beam angle:	**90°**
Luminous distribution:	**Symmetrical**
Color rendering index:	**>80**
Color rendering index, minimum:	**80**
Color rendering index, maximum:	**85**

Standard desviation of colour matching:	**<4**
Luminous flux maintenance:	**L90B10**
Flicker index:	**≤1,0**
SVM (Stroboscopic Visibility Measure):	**≤0,9**
Flicker free:	**YES**

TECHNICAL DATA

Protection rating:	**IP65 (Dust-tight equipment and protected against water jets)**
Impact rating:	**IK09 (10J)**
Operating temperature:	**-20°~50°**
Mounting type:	**Surface**

AVERAGE LIFESPAN

Working hours:	**45000 hrs**
Switching cycles:	**35000 ON/OFF**

PHYSICAL DATA

Housing

Material:	**Aluminum**
Finish:	**Gray**

Diffuser

Material:	**Polycarbonate (PC)**
Finish:	**Transparent**

Weight

Weight:	**0,18 kg**

ENERGY EFFICIENCY 2023(UE-2019/2015) F

DIMENSIONS

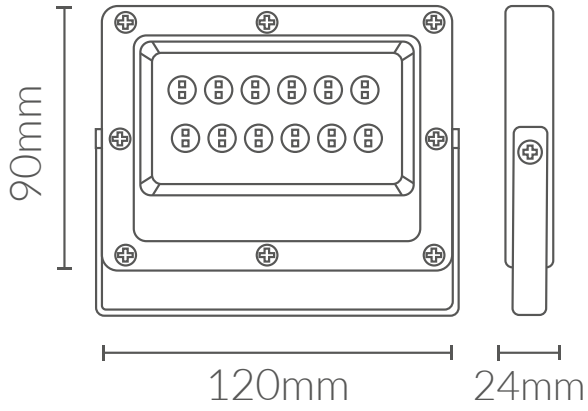

LUMINOUS INTENSITY DISTRIBUTION CURVE

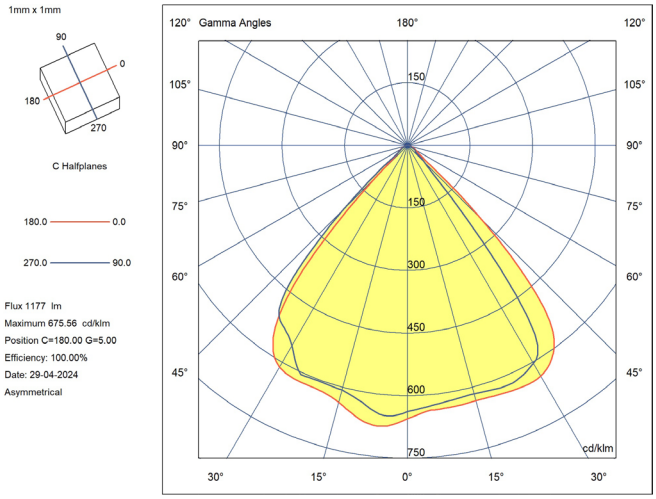

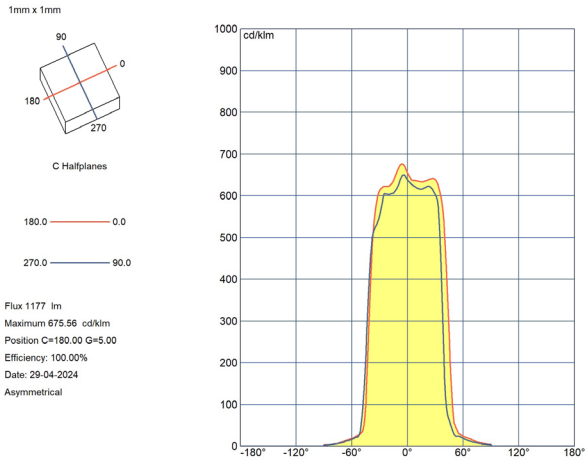

CERTIFICATIONS

CE & ROHS

EMC directive 2014/30/EU ELECTROMAGNETIC COMPATIBILIT

EN IEC 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN IEC 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current =16 A per phase).
EN 61000-3-3	Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current <= 16 A per phase and not subject to conditional connection.
EN 61547	Equipment for general lighting purposes - EMC immunity requirements.

LVD directive 2014/35/EU LOW VOLTAGE

EN 60598-2-5	Luminaires - Part 2-5: Particular requirements - Floodlights
EN 60598-1	Luminaires - Part 1: General requirements and tests.

RoHS Directive 2011/65/EU and Delegated Directive (EU) 2015/863
Determination of Certain Substances in Electrotechnical Products.

IEC 62321-1	**IEC 62321-1-2**
IEC 62321-3-1	**IEC 62321-4**
IEC 62321-6	**IEC 62321-7-1**
IEC 62321-7-2	**IEC 62321-8**

CE RoHS