

870601NW

APOLO OUTDOOR WALL LIGHT 6W 4000K

APOLO wall light, surface-mounted with adjustable light source. Suitable for outdoor use with a protection rating of IP54. Power of 6W and luminous flux of 354lm. Indirect lighting with a symmetrical 120° optical beam angle and color temperature of 4000K. Mechanical impact resistance rating IK08. Housing made of aluminum with black finish and opal polycarbonate diffuser.



PRODUCT SPECIFICATIONS

Item code:	870601NW
Description:	APOLO outdoor wall light
EAN13 code:	8436568448190

ELECTRICAL DATA

Power:	6w
Voltage:	220-240vac
Frequency:	50-60 Hz
Power factor:	0,6
Dimmable:	NOT
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	4000K
Luminous efficiency:	59 lm/w
Lumens:	354lm
LED chip model:	SMD 2835
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>80
Color rendering index (Minimum value):	80
Color rendering index (Maximum value):	83
Standard deviation of colour matching:	<6
Luminous maintenance factor:	L90B10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4

TECHNICAL DATA

Protection rating:	IP54 (Equipment protected against dust and water splashes)
Impact rating:	IK08 (5J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN


Working hours:	30000 hrs
Switching cycles:	25000 ON/OFF

PHYSICAL DATA

Housing	
Material:	Aluminum
Finish:	Black
Diffuser	
Material:	Polycarbonate
Finish:	Opal

ENERGY EFFICIENCY 2023(UE-2019/2015)	F
--------------------------------------	---

DIMENSIONS

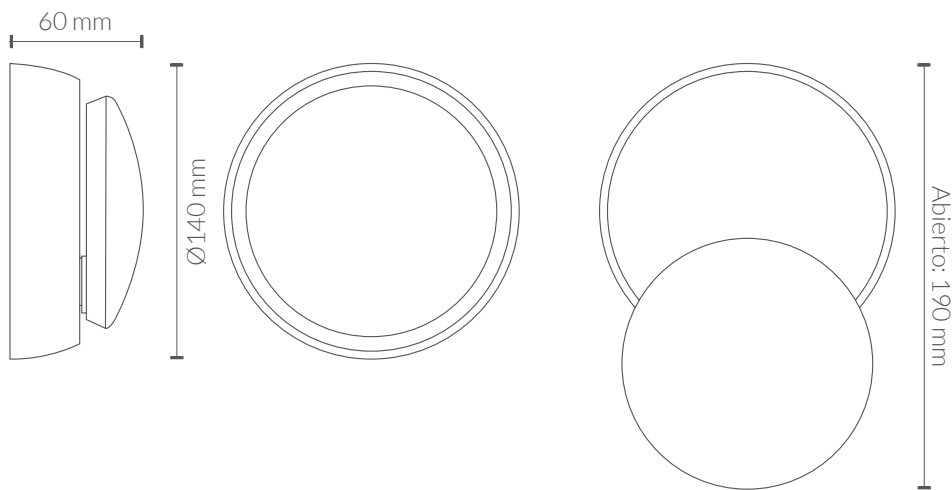

CERTIFICATIONS

