

**870701CW**

## ARTEMISA OUTDOOR WALL LIGHT 8W 5000K

ARTEMISA wall light, surface-mounted and suitable for outdoor use with a protection rating of IP54. Power of 8W and luminous flux of 560lm. Indirect lighting with a symmetrical 120° optical beam angle and color temperature of 5000K. Mechanical impact resistance rating IK08. Housing made of aluminum with black finish and opal polycarbonate diffuser.



### PRODUCT SPECIFICATIONS

|              |                             |
|--------------|-----------------------------|
| Item code:   | 870701CW                    |
| Description: | ARTEMISA outdoor wall light |
| EAN13 code:  | 8436568446974               |

### ELECTRICAL DATA

|                              |            |
|------------------------------|------------|
| Power:                       | 8w         |
| Voltage:                     | 220-240vac |
| Frequency:                   | 50-60 Hz   |
| Power factor:                | 0,6        |
| Dimmable:                    | NOT        |
| Electrical insulation class: | CLASS I    |
| Connection:                  | L/N+TT     |

### LUMINOUS DATA

|                                        |             |
|----------------------------------------|-------------|
| Color temperature:                     | 5000K       |
| Luminous efficiency:                   | 70 lm/w     |
| Lumens:                                | 560lm       |
| LED chip model:                        | SMD 2835    |
| Beam angle:                            | 120°        |
| Luminous distribution:                 | Symmetrical |
| Color rendering index:                 | >80         |
| Color rendering index (Minimum value): | 80          |
| Color rendering index (Maximum value): | 83          |
| Standard deviation of colour matching: | <6          |
| Luminous maintenance factor:           | L90B10      |
| Flicker index:                         | ≤1,0        |
| SVM (Stroboscopic Visibility Measure): | ≤0,4        |

TECHNICAL DATA

|                        |                                                            |
|------------------------|------------------------------------------------------------|
| Protection rating:     | IP54 (Equipment protected against dust and water splashes) |
| Impact rating:         | IK08 (5J)                                                  |
| Operating temperature: | -20°~50°                                                   |
| Mounting type:         | Surface                                                    |

AVERAGE LIFESPAN


|                   |              |
|-------------------|--------------|
| Working hours:    | 30000 hrs    |
| Switching cycles: | 25000 ON/OFF |

PHYSICAL DATA

|           |               |
|-----------|---------------|
| Housing   |               |
| Material: | Aluminum      |
| Finish:   | Black         |
| Diffuser  |               |
| Material: | Polycarbonate |
| Finish:   | Opal          |

|                                      |   |
|--------------------------------------|---|
| ENERGY EFFICIENCY 2023(UE-2019/2015) | G |
|--------------------------------------|---|

DIMENSIONS

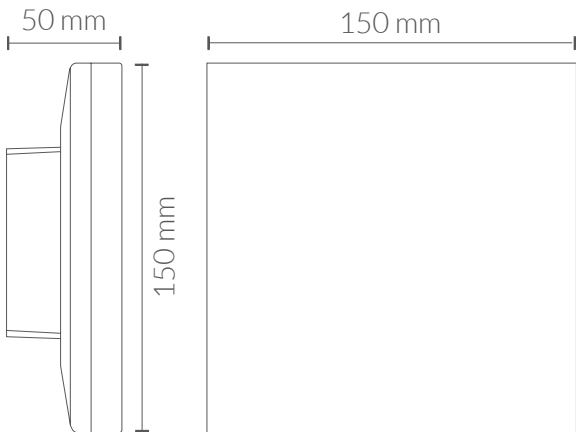

LUMINOUS INTENSITY DISTRIBUTION CURVE

