

870230CCT

BAMAKO OUTDOOR BOLLARD 1,6W CCT

BAMAKO wall-mounted bollard, surface-mounted and suitable for outdoor use with a protection rating of IP65. Power of 1.6W and luminous flux of 140lm. Indirect downward lighting and 3 selectable color temperatures via DIP switch. Mechanical impact resistance rating IK07. Housing made of ABS with gray finish.



PRODUCT SPECIFICATIONS

Item code:	870230CCT
Description:	BAMAKO outdoor bollard
EAN13 code:	8435724901975

ELECTRICAL DATA

Power:	1,6w
Voltage:	220-240vac
Frequency:	50 Hz
Power factor:	0,5
Dimmable:	NOT
Electrical insulation class:	CLASS II
Connection:	L/N

LUMINOUS DATA

Color temperature:	Selectable CCT 5700K/4000K/2700K
Luminous efficiency:	98 lm/w
Color temperature selection mode:	DIP switch
Lumens:	144lm
LED chip model:	SMD 2835
N.° LED chip:	16 pcs
Beam angle:	120°
Luminous distribution:	Symmetrical indirect
Light direction:	Downward
Color rendering index:	>80
Color rendering index (Minimum value):	80
Color rendering index (Maximum value):	90
Standard desviation of colour matching:	<6
Luminous maintenance factor:	L90
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4

TECHNICAL DATA

Protection rating:	IP65 (dust-tight equipment and protected against water jets)
Impact rating:	IK07 (2J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN


Working hours:	25000 hrs
Switching cycles:	20000 ON/OFF

PHYSICAL DATA

Housing	
Material:	ABS
Finish:	Gray
Diffuser	
Material:	Polycarbonate
Finish:	Transparente

ENERGY EFFICIENCY 2023(UE-2019/2015)	G
--------------------------------------	---

DIMENSIONS

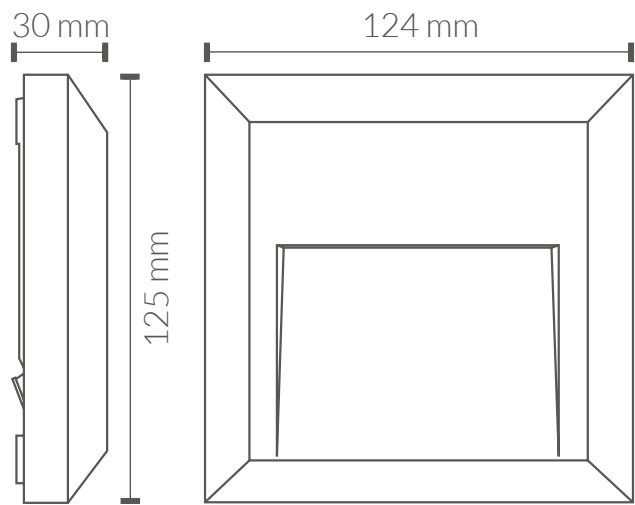

CERTIFICATIONS

