

870230CW

BAMAKO OUTDOOR BOLLARD 1,6W

BAMAKO outdoor wall bollard. Surface-mounted luminaire suitable for outdoor use with an IP65 protection rating. 1.6W power and 90lm luminous flux. Indirect downward light distribution with a 5000K colour temperature. IK07 mechanical impact resistance rating. ABS body with a grey finish.



PRODUCT SPECIFICATIONS

Item code:	870230CW
Description:	BAMAKO Outdoor Bollard
EAN13 code:	8436568442204

ELECTRICAL DATA

Power:	1,6w
Voltage:	220-240vac
Frequency:	50 Hz
Power factor:	0,5
Dimmable:	NOT
Electrical insulation class:	CLASS II
Connection:	L/N

LUMINOUS DATA

Color temperature:	5000K
Luminous efficiency:	100 lm/w
Lumens:	90lm
LED chip model:	SMD 2835
N.° LED chip:	16 pcs
Beam angle:	120°
Luminous distribution:	Symmetrical indirect
Light direction:	Downward
Color rendering index:	>80
Color rendering index (Minimum value):	80
Color rendering index (Maximum value):	90
Standard desviation of colour matching:	<6
Luminous maintenance factor:	L90B10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4

TECHNICAL DATA

Protection rating:	IP65 (Dust-tight and protected against water jets)
Impact rating:	IK07 (2J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN


Working hours:	25000 hrs
Switching cycles:	20000 ON/OFF

PHYSICAL DATA

Housing	
Material:	ABS
Finish:	Grey
Diffuser	
Material:	Polycarbonato
Finish:	Transparent

ENERGY EFFICIENCY 2023(UE-2019/2015)	G
--------------------------------------	---

DIMENSIONS

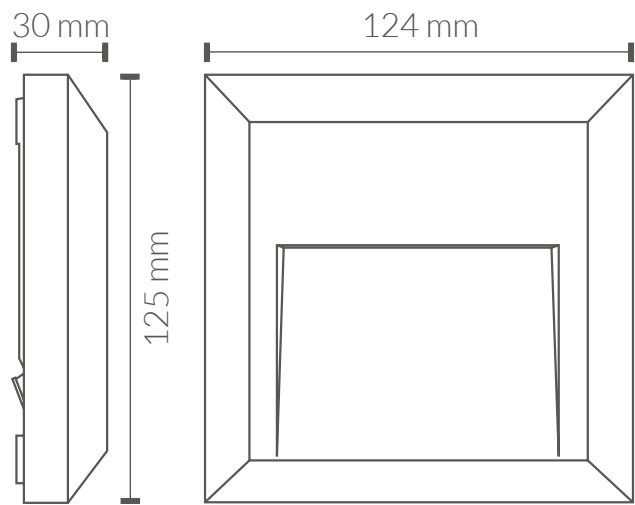

CERTIFICATIONS

