


TECHNICAL DATA



871400CCT

IRIS OUTDOOR WALL LIGHT 2X6W CCT

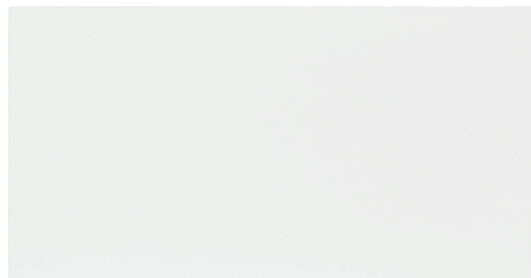

IRIS wall light, surface-mounted and suitable for outdoor use with a protection rating of IP54. Power of 2x6W and luminous flux of 900lm. Indirect lighting upwards and downwards and 3 selectable color temperatures via DIP switch. Mechanical impact resistance rating IK08. Housing made of aluminum with white finish.



PRODUCT SPECIFICATIONS

Item code:	871400CCT
Description:	IRIS Outdoor Wall Light
EAN13 code:	8435724902002

ELECTRICAL DATA

Power:	2x6w
Voltage:	220-240vac
Frequency:	50 Hz
Power factor:	0,6
Dimmable:	NOT
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	Selectable CCT 5700K/4000K/2700K
Luminous efficiency:	75 lm/w
Color temperature selection mode:	DIP switch
Lumens:	900lm
LED chip model:	SMD 2835
N.° LED chip:	60 pcs
Beam angle:	120°
Luminous distribution:	Symmetrical indirect
Light direction:	Upwards and downwards
Color rendering index:	>80
Color rendering index (Minimum value):	80
Color rendering index (Maximum value):	90
Standard deviation of colour matching:	<6
Luminous maintenance factor:	L90B10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4

TECHNICAL DATA

Protection rating:	IP54 (Equipment protected against dust and water splashes)
Impact rating:	IK08 (5J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN


Working hours:	30000 hrs
Switching cycles:	25000 ON/OFF

PHYSICAL DATA

Housing	
Material:	Aluminum
Finish:	White
Diffuser	
Material:	Polycarbonate
Finish:	Transparent

ENERGY EFFICIENCY 2023(UE-2019/2015)	G
--------------------------------------	---

DIMENSIONS

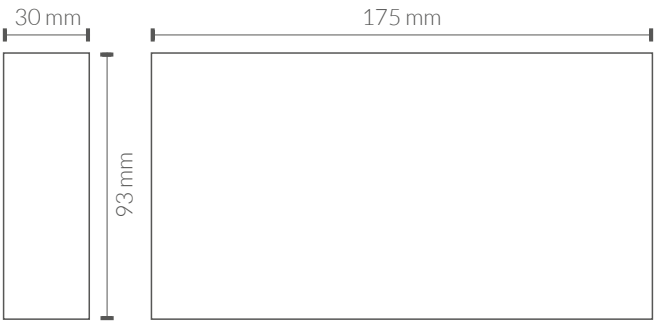

CERTIFICATIONS

