

## 736030CCT

### VEGA SOLAR STREET LUMINAIRE S60

Street luminaire for public lighting with integrated solar panel model VEGA, 10W consumption and 1400lm brightness. Color temperature selectable via remote control (5500K/4000K/3000K), equipped with 28 pcs Lumileds SMD3030 LEDs in 5700K and 28 pcs in 3000K. LiFePO4 battery model with up to 12 hours of continuous operation. Includes radar motion sensor and permanent on/off switch. Asymmetric optical distribution of 80°x150°. Protection rating against external elements IP65 and mechanical impact resistance rating IK08. Die-cast aluminum body with gray finish, monocrystalline solar panel, and polycarbonate lenses. Adjustable arm for installation on poles or columns. Remote control included.



#### PRODUCT SPECIFICATIONS

|              |   |
|--------------|---|
| Item code:   | 736030CCT                                       |
| Description: | Vega solar street luminaire for public lighting |
| EAN13 code:  | 8435724902071                                   |

#### ELECTRICAL DATA

|                              |           |
|------------------------------|-----------|
| Consumption:                 | 10w       |
| Dimmable:                    | YES       |
| Electrical insulation class: | CLASS III |

#### LUMINOUS DATA

|                              |                                  |
|------------------------------|----------------------------------|
| Color temperature:           | Selectable CCT 5500K/4000K/3000K |
| Luminous efficiency:         | 140 lm/w                         |
| Lumens:                      | 1400lm                           |
| LED chip brand:              | Lumileds                         |
| LED chip model:              | SMD 3030                         |
| Number of LED chips:         | 28pcs 5700K + 28pcs 3000K        |
| Beam angle:                  | 80°x150°                         |
| Light distribution:          | Asymmetric                       |
| Color rendering index:       | >80                              |
| Luminous maintenance factor: | L95B10                           |

## BATTERY DATA

|                  |               |
|------------------|---------------|
| Model:           | 37200 LiFePO4 |
| Capacity:        | 15Ah          |
| Voltage:         | 3,2v          |
| Charging time:   | 7 hrs         |
| Operating hours: | 12 hrs        |

## SOLAR PANEL DATA

|          |     |
|----------|-----|
| Power:   | 15v |
| Voltage: | 6Ah |

## MOTION SENSOR DATA

|                        |                        |
|------------------------|------------------------|
| Sensor type::          | Radar                  |
| Operation mode:        | 30% Stand By / 100% on |
| Configuration options: | NO                     |
| Detection area:        | Max. 10 mts            |
| Detection angle:       | 120°                   |
| On time:               | 15 sec.                |

## OPERATION DATA

|                                |   |
|--------------------------------|---|
| Control mode:                  | Remote control  |
| Operation mode:                | Option 1: Operation with motion sensor                                |
|                                | Option 2: Operation with time control                                 |
| Luminous intensity regulation: | YES   |
| Color temperature selection:   | Selectable CCT 5500K/4000K/3000K via remote control                   |
|                                | Incorporates an on/off switch to activate or deactivate the luminaire |

## TECHNICAL DATA

|                        |   |
|------------------------|---|
| Protection rating:     | IP65 (Dust-tight and protected against water jets)  |
| Impact rating:         | IK08 (10J)  |
| Operating temperature: | -20°~50°  |
| Mounting type:         | Superficie  |
| Mounting method:       | Vertical mounting bracket for pole installation<br>Horizontal mounting bracket for arm installation |
| Mounting device:       | Interior diameter D63 mm  |

## PHYSICAL DATA

### Luminaire body

|           |                   |
|-----------|-------------------|
| Material: | Die-cast aluminum |
| Finish:   | Grey RAL 7001     |

### Lenses

|           |               |
|-----------|---------------|
| Material: | Polycarbonate |
| Finish:   | Transparent   |


### Solar panel

|           |                                   |
|-----------|-----------------------------------|
| Material: | Monocrystalline silicon and glass |
|-----------|-----------------------------------|

### Weight


|         |         |
|---------|---------|
| Weight: | 3,50 kg |
|---------|---------|

## DIMENSIONS

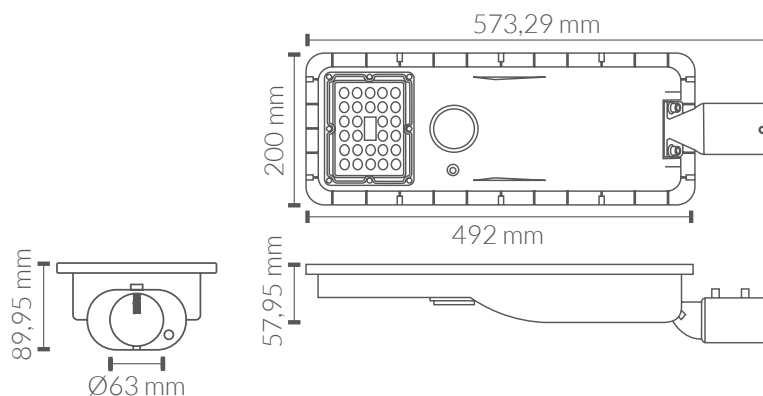


## OPERATING DIAGRAM

### Option 1: Time control

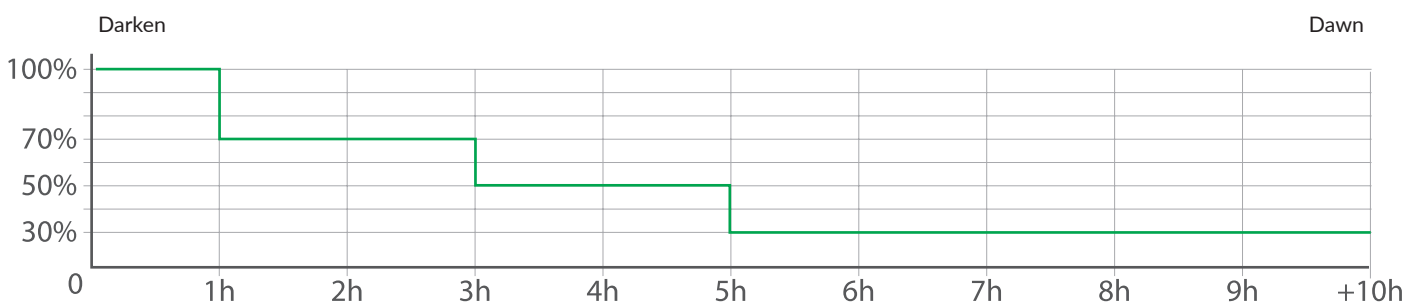

The luminaire turns on at dusk and turns off at dawn, with brightness levels gradually decreasing over time. The maximum operating time with this configuration is 12 hours.


### Option 2: Motion sensor

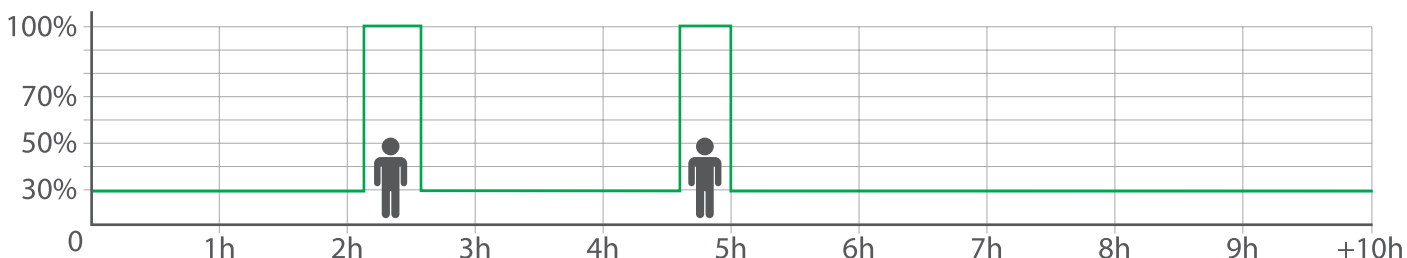

The luminaire remains on at 30% brightness and turns on to full brightness for 15 seconds upon detecting motion.

## REMOTE CONTROL FUNCTIONS


| KEY      | FUNCTIONS                                |
|----------|--|
| ON       | ON                                       |
| OFF      | OFF                                      |
| + bright | Increase the brightness                  |
| - bright | Decrease the brightness                  |
| W        | Color temperature 5500K                  |
| W/Y      | Color temperature 4000K                  |
| Y        | Color temperature 3000K                  |
| AUTO     | Motion sensor mode                       |
| AW       | Time control mode                        |
| 3H/5H/8H | Motion sensor mode during selected hours |

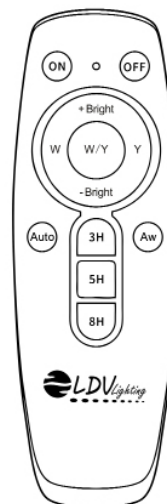

# LUMINOUS INTENSITY DISTRIBUTION CURVE

## 5500K


140mm x 230mm




C Halfplanes

180.0 — 0.0  
270.0 — 90.0

Flux 1419 lm  
Maximum 558.86 cd/klm  
Position C=255.00 G=60.00  
Efficiency: 100.00%  
Date: 26-03-2024  
Asymmetrical

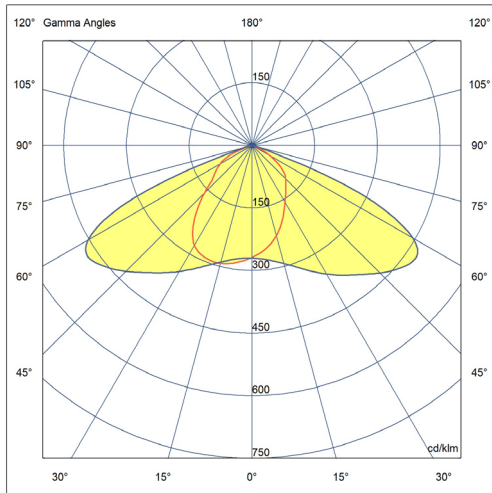


140mm x 230mm



C Halfplanes


180.0 — 0.0  
270.0 — 90.0

Flux 1419 lm  
Maximum 558.86 cd/klm  
Position C=255.00 G=60.00  
Efficiency: 100.00%  
Date: 26-03-2024  
Asymmetrical

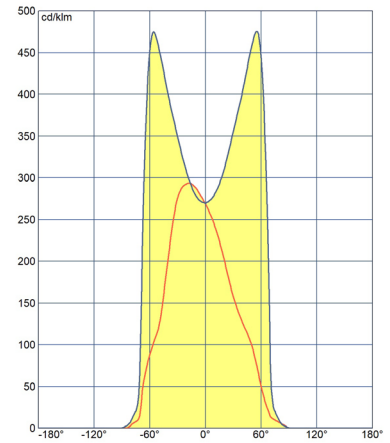

## 4000K


140mm x 230mm




C Halfplanes

180.0 — 0.0  
270.0 — 90.0

Flux 1470 lm  
Maximum 560.25 cd/klm  
Position C=105.00 G=57.00  
Efficiency: 100.00%  
Date: 25-03-2024  
Asymmetrical

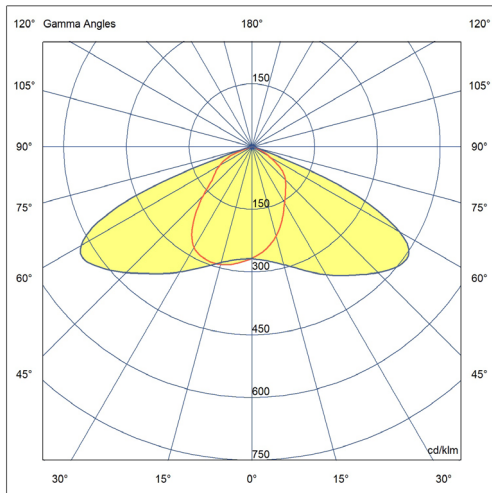


140mm x 230mm



C Halfplanes


180.0 — 0.0  
270.0 — 90.0

Flux 1470 lm  
Maximum 560.25 cd/klm  
Position C=105.00 G=57.00  
Efficiency: 100.00%  
Date: 25-03-2024  
Asymmetrical

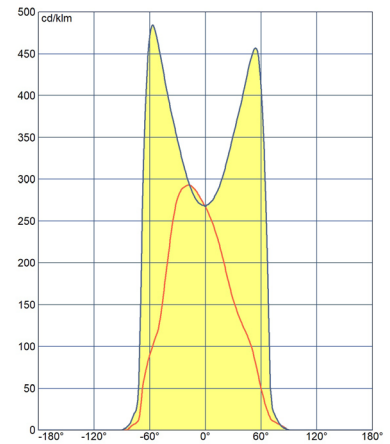

## 3000K


140mm x 230mm




C Halfplanes

180.0 — 0.0  
270.0 — 90.0

Flux 1299 lm  
Maximum 607.63 cd/klm  
Position C=105.00 G=57.00  
Efficiency: 100.00%  
Date: 26-03-2024  
Asymmetrical

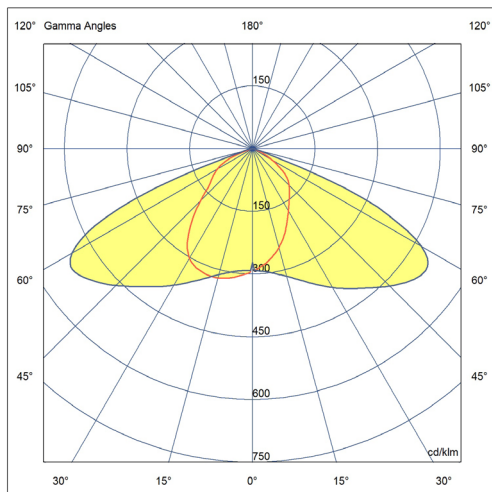


140mm x 230mm



C Halfplanes

180.0 — 0.0  
270.0 — 90.0

Flux 1299 lm  
Maximum 607.63 cd/klm  
Position C=105.00 G=57.00  
Efficiency: 100.00%  
Date: 26-03-2024  
Asymmetrical

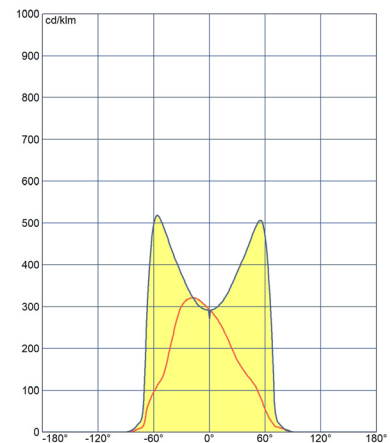

**EMC directive 2014/30/EU ELECTROMAGNETIC COMPATIBILIT**

- EN IEC 55015** Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
- EN 61547** Equipment for general lighting purposes - EMC immunity requirements.
- EN IEC 61000-3-2** Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current =16 A per phase).
- EN 61000-3-3** Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current  $\leq 16$  A per phase and not subject to conditional connection.

**LVD directive 2014/35/EU LOW VOLTAGE**

- EN IEC60598-1** Luminaires - Part 1: General requirements and tests.
- EN 60598-2-3** Luminaires -- Part 2-3: Particular requirements - Luminaires for road and street lighting.
- EN 62031** LED modules for general lighting - Safety specifications.
- EN 62493** Assessment of lighting equipment related to human exposure to electromagnetic Field.

**RoHS Directive 2011/65/EU and Delegated Directive (EU) 2015/863**

Determination of Certain Substances in Electrotechnical Products.

