
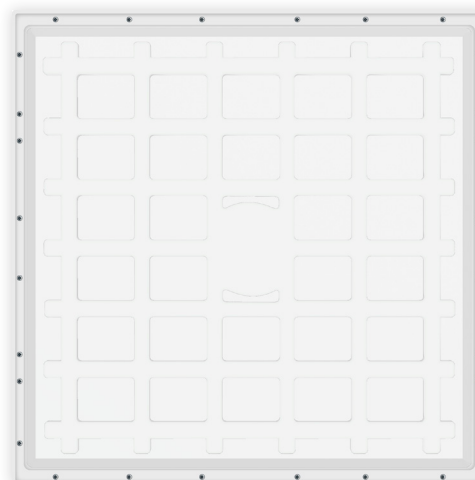


666060CCT19

CCT LED PANEL UGR<19 60X60CM CCT 40W

CCT LED panel with high visual comfort UGR<19, 60x60cm, 40W power and 4400lm luminous flux. Symmetrical 120° beam angle and selectable colour temperature (6000K / 4000K / 3000K) via external selector. Protection rating against external elements IP20 and mechanical resistance rating IK06. Made of aluminium with white finish.

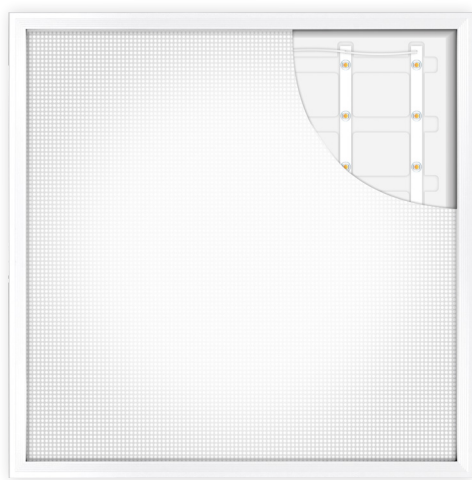

DATOS DEL PRODUCTO

| | |
|--------------|---------------|
| Item code: | 666060CCT19 |
| Description: | Panel LED |
| EAN13 code: | 8432724905347 |
| Warranty: | 5 años |

ELECTRICAL DATA

| | |
|-----------------------------------|--------------------|
| Power: | 40w |
| Voltage: | 198-264vac |
| Frequency: | 50-60Hz |
| Driver model: | Lifud; LF-GUIF04ES |
| Driver ENEC certification: | Si |
| Driver TUV certification: | Si |
| Driver SELV Output certification: | Si |
| Driver protection: | OTP, SCP, NO-LOAD |
| Power factor: | 0,9 |
| Dimmable: | NO |
| Electrical insulation class: | CLASE II |
| Connection: | L/N |

LUMINOUS DATA

| | |
|---|-----------------------|
| Color temperature: | CCT Seleccioable |
| CCT options: | 6000K / 4000K / 3000K |
| Selection system: | Selector externo |
| Luminous efficiency | 110 lm/w |
| Lumens: | 4400lm |
| LED chip model: | SMD 2835 |
| Beam angle: | 120° |
| Luminous distribution: | Simétrica |
| Color rendering index: | >80 |
| Standard desviation of colour matching: | <6 |
| Luminous maintenance factor: | L96 |
| Flicker index: | ≤1,0 |
| SVM (Stroboscopic Visibility Measure): | ≤0,4 |
| Unified Glare Rating: | UGR<19 |
| Flicker free: | SI |


TECHNICAL DATA

| | |
|------------------------|---|
| Protection rating: | IP20 (Equipo protegido contra objetos de >12mm de diámetro) |
| Impact rating: | IK06 (1J) |
| Operating temperature: | -20°~50° |
| Mounting type: | Empotrar |

AVERAGE LIFESPAN

| | |
|----------------|--------------|
| Working hours: | 55000 hrs |
| Switch cycles: | 40000 ON/OFF |

PHYSICAL DATA

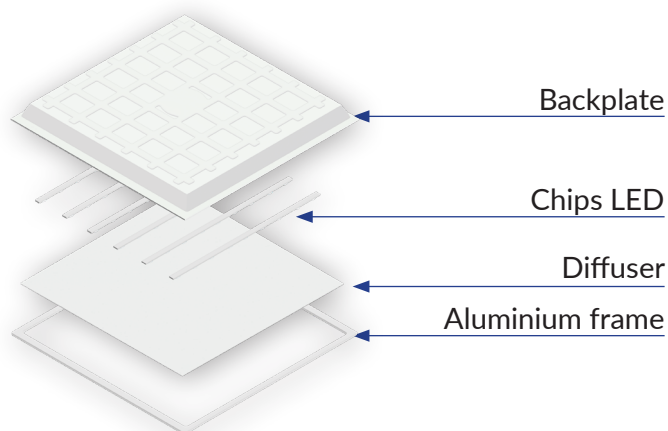

Luminaire frame

| | |
|-----------|-----------|
| Material: | Aluminium |
| Finish: | White |


Diffuser

| | |
|-----------|-------------------|
| Material: | PS 1 mm thickness |
|-----------|-------------------|

Backplate

| | |
|-----------|---------------------------|
| Material: | Aluminium 0,5mm thickness |
|-----------|---------------------------|

DIMENSIONS

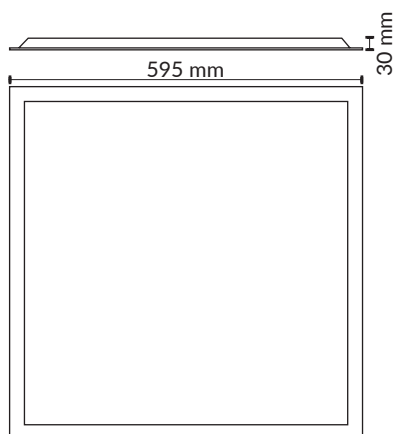

CERTIFICATIONS

