


## 606040NW19R

### LED ARMSTRONG PANEL 40W 60X60CM UGR<19 4500K DALI- 2 / PUSH DIM DIMMABLE

ARMSTRONG LED Panel 60x60cm with Unified Glare Rating <19, dimmable with DALI-2 / PUSH DIM system. 40W power and 3760lm luminous flux. Symmetrical optical opening of 120° and colour temperature of 4500K. IP20 protection rating against external elements and IK06 mechanical impact resistance rating. Made of aluminium with white finish.

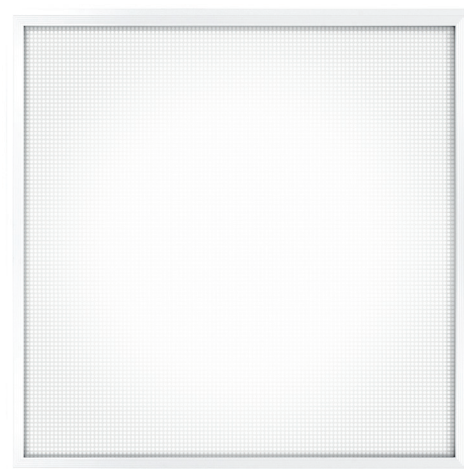

#### PRODUCT SPECIFICATIONS

Código del artículo:	606040NW19R
Descripción:	Dimmable LED Panel
Código EAN13:	8436568447544

#### ELECTRICAL DATA

Power:	40w
Voltage:	180-264vac
Frequency:	50-60Hz
ENEC certificate for the driver:	YES
TUV certificate for the driver:	YES
Power factor:	0,9
Dimmable:	YES
Dimming system:	DALI-2 / PUSH DIM
Electrical insulation class:	CLASS II
Connection:	L/N

#### LUMINOUS DATA

Color temperature:	4500K
Luminous efficiency:	94 lm/w
Lumens:	3760lm
LED chip brand:	SMD 4014
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>80
Color rendering index, minimum:	80
Color rendering index, maximum:	83

Standard desviation of colour matching:	<6
Luminous maintenance factor:	L90
Flicker index:	≤1,0
Unified glare rating:	UGR<19
SVM (Stroboscopic Visibility Measure)::	≤0,4
Flicker free:	YES


## TECHNICAL DATA

Protection rating:	IP20 (Equipment protected against objects >12mm in diameter)
Impact rating:	IK06 (1J)
Operating temperature:	-20°~50°
Mounting type:	Armstrong ceiling recessed

## AVERAGE LIFESPAN

Working hours:	45000 hrs
Switching cycles:	35000 ON/OFF


## PHYSICAL DATA

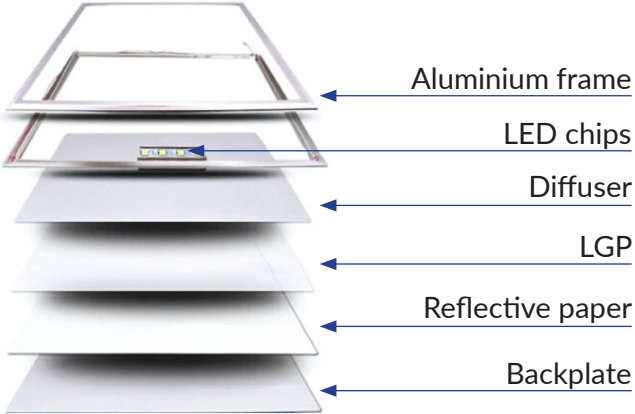	<b>Housing</b>
	Material: Aluminum
	Finish: White
	<b>Diffuser</b>
	Material: Polystyrene: 1mm thick
	<b>LGP</b>
	Material: MS: 2mm thick
	<b>Backplate</b>
	Material: Metal: 0,22mm thick
	<b>Weight</b>
Weight: 1,65 Kg	



## ENERGY EFFICIENCY 2023(UE-2019/2015)

F

## MEDIDAS

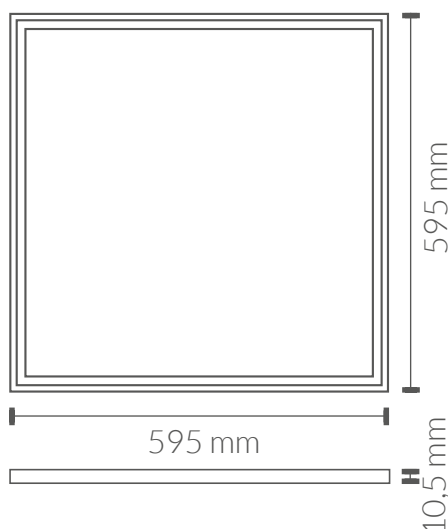

## LUMINOUS INTENSITY DISTRIBUTION CURVE

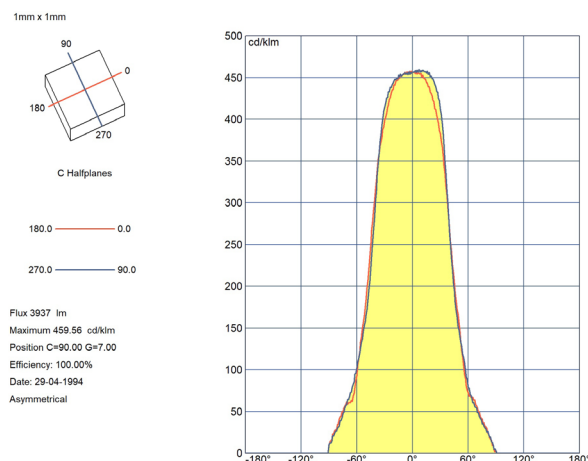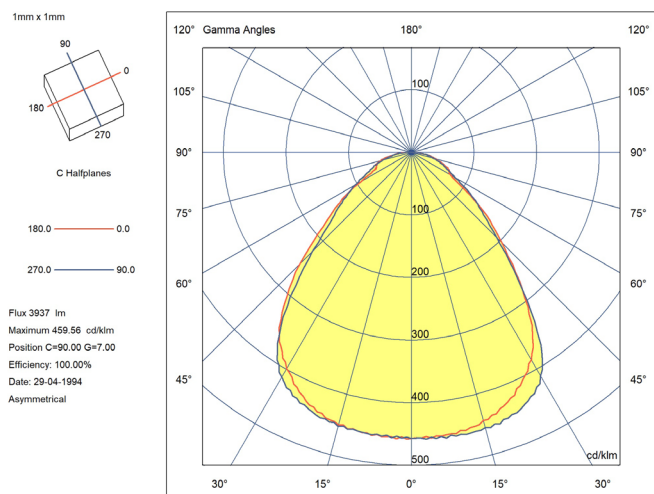

## CERTIFICATIONS

CE & ROHS

### EMC directive 2014/30/EU ELECTROMAGNETIC COMPATIBILIT

- EN IEC 55015** Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
- EN 61547** Equipment for general lighting purposes - EMC immunity requirements.
- EN IEC 61000-3-2** Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current =16 A per phase).
- EN 61000-3-3** Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current <= 16 A per phase and not subject to conditional connection.

### LVD directive 2014/35/EU LOW VOLTAGE

- EN 60598-1** Luminaires - Part 1: General requirements and tests.
- EN 60598-2-2** Luminaires - Part 2-2: Particular requirements - Recessed luminaires.
- EN IEC 62031** LED modules for general lighting - Safety specifications.
- EN 62493** Assessment of lighting equipment related to human exposure to electromagnetic fields.

### RoHS Directive 2011/65/EU and Delegated Directive (EU) 2015/863 Determination of Certain Substances in Electrotechnical Products.

- IEC 62321-2**            **IEC 62321-3-1**
- IEC 62321-4**            **IEC 62321-5**
- IEC 62321-6**            **IEC 62321-7-2**
- IEC 62321-7-1**        **IEC 62321-8**

