

Input and output at
both ends

6806020CWL

LINKABLE LED WATERPROOF FIXTURE 20W 600MM 5700K

Linkable LED waterproof lighting fixture. 20W power and 3000lm luminous flux. Symmetrical 120° beam angle and 5700K colour temperature. IP67 protection rating against external elements and IK08 mechanical impact resistance rating. ABS base with an opal polycarbonate diffuser.



PRODUCT SPECIFICATIONS

Item code:	6806020CWL
Description:	Linkable LED waterproof fixture
EAN13 code:	8435724904075

ELECTRICAL DATA

Power:	20w
Voltage:	220-240vac
Frequency:	50-60Hz
Power factor:	0,9
Dimmable:	NOT
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	5700K
Luminous efficiency:	150 lm/w
Lumens:	3000lm
LED chip model:	SMD 2835
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>80
Color rendering index (Minimum value):	80
Color rendering index (Maximum value):	83
Standard desviation of colour matching:	<6
Luminous maintenance factor:	L95B10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4
Flicker free:	YES

TECHNICAL DATA

Protection rating:	IP67 (Dust-tight and protected against temporary immersion in water up to 1 metre for 30 minutes)
Impact rating:	IK08 (5J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN



Working hours:	45000 hrs
Switching cycles:	35000 ON/OFF

PHYSICAL DATA

Housing	
Material:	ABS
Finish:	Gris
Diffuser	
Material:	Polycarbonato
Finish:	Opal
Weight	
Weight:	0,75 kg



ENERGY EFFICIENCY 2023(UE-2019/2015)	E
--------------------------------------	---

DIMENSIONS

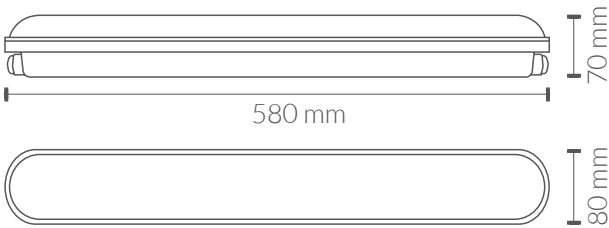

Input and output at both ends

LUMINOUS INTENSITY DISTRIBUTION CURVE

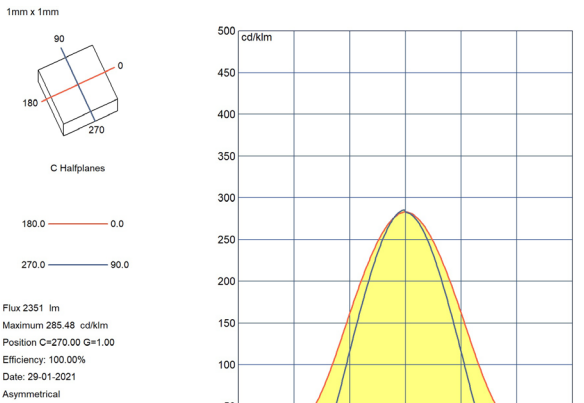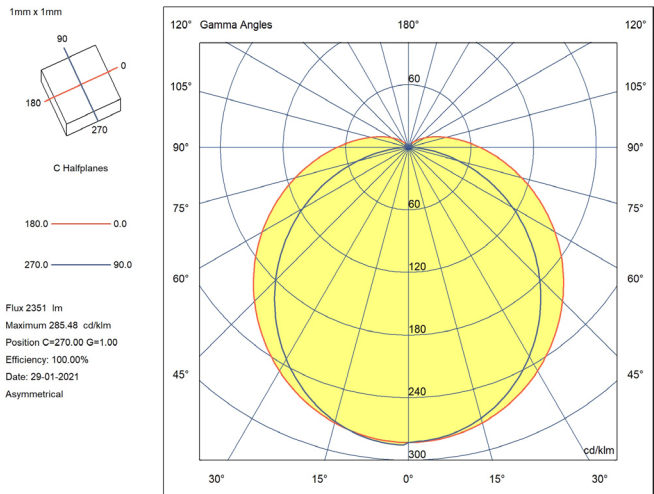

EMC Directive 2014/30/EU – ELECTROMAGNETIC COMPATIBILITY

- EN IEC 55015** Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
- EN 61547:** Lighting equipment for general lighting purposes. EMC immunity requirements.
- EN IEC 61000-3-2** Electromagnetic Compatibility (EMC). Part 3-2: Limits. Limits for harmonic current emissions (equipment with input current ≤ 16 A per phase).
- EN 61000-3-3** Electromagnetic Compatibility (EMC). Part 3-3: Limits. Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.

LVD Directive 2014/35/EU – LOW VOLTAGE

- EN IEC 60598-2-1** Luminaires. Part 2-1: Particular requirements. Fixed luminaires for general lighting.
- EN IEC 60598-1** Luminaires. Part 1: General requirements and tests.
- EN 62493** Assessment of lighting equipment related to human exposure to electromagnetic fields.

RoHS Directive 2011/65/EU and Delegated Directive (EU) 2015/863

Determination of certain substances in electrotechnical products.

- | | |
|----------------------|-----------------------|
| IEC 62321-3-1 | IEC 62321-5 |
| IEC 62321-7 | EN ISO 17075-1 |
| IEC 62321-4 | IEC 62321-7-1 |
| IEC 62321-6 | IEC 62321-8 |

