



TECHNICAL DATA



Not linkable




Linkable



6812040CCT

CCT LED WATERPROOF FIXTURE 40W 1200MM

CCT LED waterproof fixture 120 cm. 40W power and 150 lm/W efficiency, 6000lm luminous flux. Lifud FMR series multi-voltage driver. Symmetrical 120° beam angle and selectable colour temperature between 5700K, 4000K and 3000K. Protection rating IP67 and mechanical impact resistance rating IK08. ABS base and opal polycarbonate diffuser. Linkable installation via secondary connector.

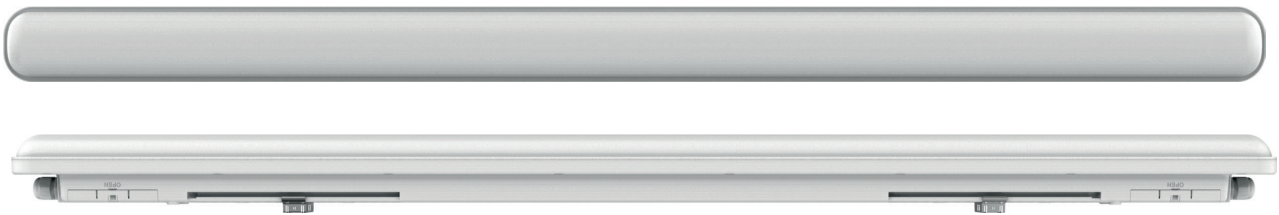

PRODUCT SPECIFICATIONS

Item code :	6812040CCT
Description:	LED waterproof fixture
EAN13 code:	8435724907359

ELECTRICAL DATA

Power:	40W
Voltage:	100-264V AC
Frequency:	50-60Hz
Driver model:	Lifud serie FMR
ENEC certification:	YES
Power factor:	0,9
Dimmable:	NOT
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	Selectable CCT 5700K / 4000K / 3000K
Colour temperature selection mode:	Integrated DIP switch
Luminous efficiency:	150 lm/w
Lumens:	6000lm
LED chip model:	SMD 2835
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>80
Color rendering index minimum:	80
Color rendering index maximum:	83

Standard deviation of colour matching:	<6
Luminous maintenance factor:	L95D10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4
Libre flicker:	YES

TECHNICAL DATA

Protection rating:	IP67 (dust-tight and protected against temporary immersion in water up to 1m depth for 30 minutes)
Impact rating:	IK08 (5J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN

Working hours:	45000 hrs
Switching cycles:	35000 ON/OFF


PHYSICAL DATA

Housing	
Material:	ABS
Finish:	Grey
Diffuser	
Material:	Polycarbonate
Finish:	Opal
Weight	
Weight:	0,85 kg

ENERGY EFFICIENCY 2023(UE-2019/2015)

F

DIMENSIONS

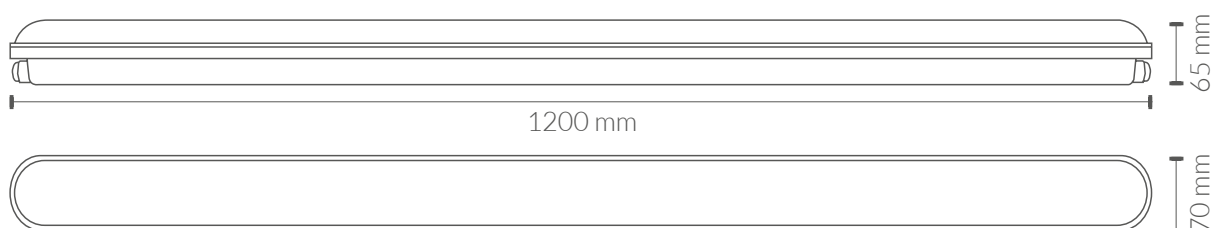

Connection option





Not linkable



Linkable

LUMINOUS INTENSITY DISTRIBUTION CURVE

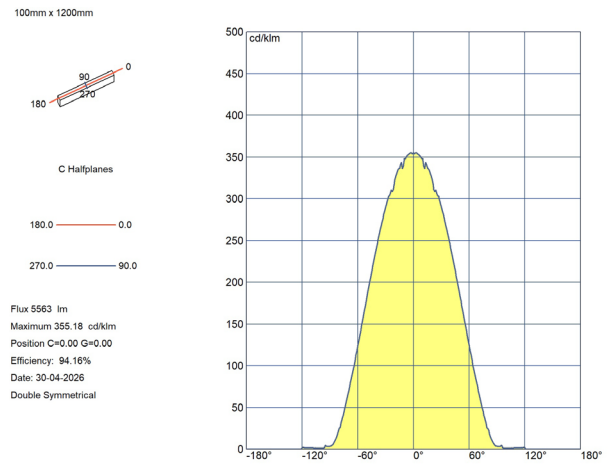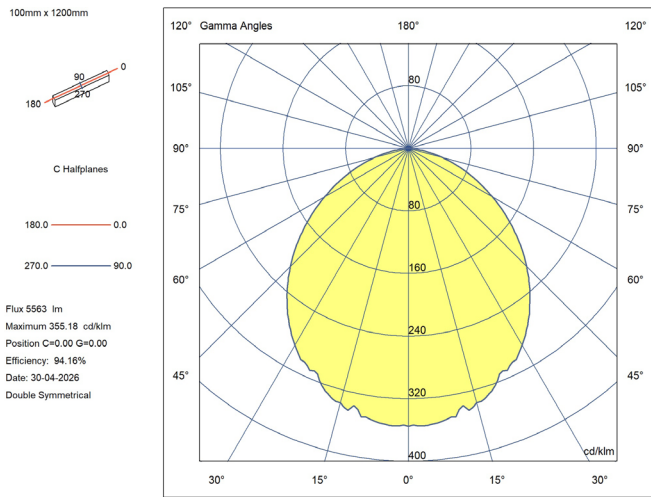

CERTIFICATIONS

