

332006ECCT

LED CEILING LIGHT WITH EMERGENCY KIT 20W CCT

LED ceiling light with emergency kit. 20W power and 2200lm luminous flux. 120° symmetrical optical opening and 3 selectable colour temperatures via DIP switch. IP20 protection rating against external elements and IK06 mechanical impact resistance rating. White finish metal base and opal PMMA diffuser.



PRODUCT SPECIFICATIONS

Item code:	332006ECCT
Description:	Indoor LED ceiling light with emergency kit
EAN13 code:	8436568445618

ELECTRICAL DATA

Power:	20w
Voltage:	170-265vac
Frequency:	50Hz
Power factor:	0,7
Dimmable:	NOT
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	CCT Selectable 5700K/4000K/3000K
Luminous efficiency:	110 lm/w
Lumens:	2200lm
LED chip brand:	San'an
LED chip model:	SMD 2835
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>80
Standard deviation of colour matching:	<6
Luminous maintenance factor:	L95
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,4

EMERGENCY KIT DATA

Power:	3W
Luminance:	200lm
Autonomy:	90 minutes
Function:	Non-permanent
Battery:	Ni-Cd 3.7v/2.2Ah

TECHNICAL DATA

Protection rating:	IP20 (Equipment protected against objects >12?mm in diameter)
Impact rating:	IK06 (1J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN

Working hours:	35000 hrs
Switch cycles:	25000 ON/OFF

PHYSICAL DATA

Housing

Material:	Metal
Finish:	White


Diffuser

Material:	PMMA
Finish:	Opal



ENERGY EFFICIENCY 2023(UE-2019/2015)

E

DIMENSIONS

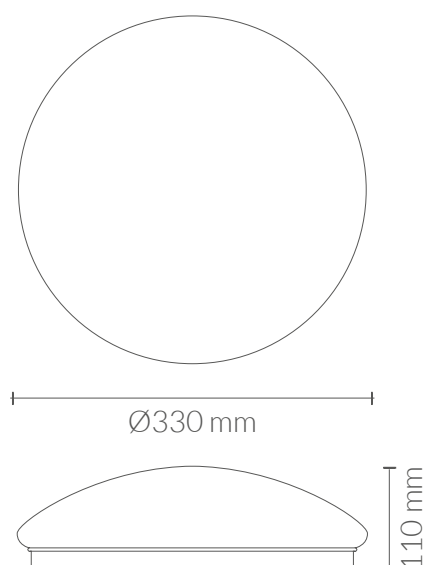

LUMINOUS INTENSITY DISTRIBUTION CURVE

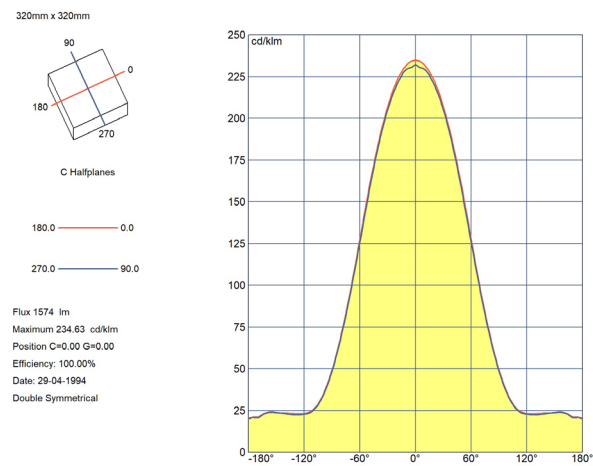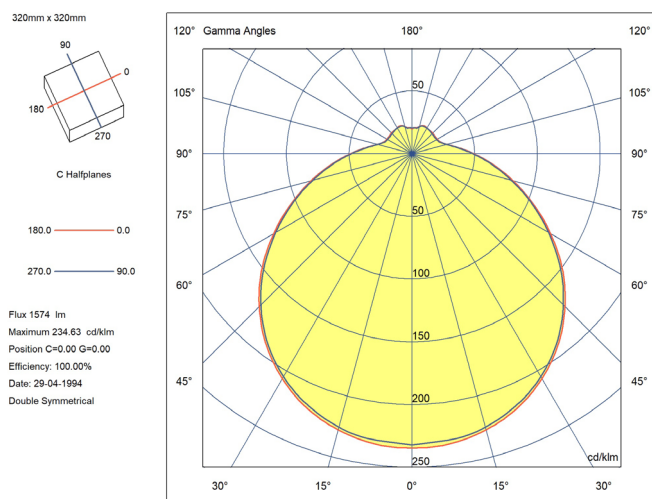

CERTIFICACIONES

CE & ROHS

EMC directive 2014/30/EU ELECTROMAGNETIC COMPATIBILIT

- EN IEC 55015** Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
- EN 61547** Equipment for general lighting purposes - EMC immunity requirements.
- EN IEC 61000-3-2** Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current =16 A per phase).
- EN 61000-3-3** Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.

LVD directive 2014/35/EU LOW VOLTAGE

- EN 60598-2-22** Luminaires - Part 2-22: Particular requirements - Luminaires for emergency lighting
- EN 60598-1** Luminaires - Part 1: General requirements and tests.
- EN 62471** Photobiological safety of lamps and lamp systems
- EN 62493** Assessment of lighting equipment related to human exposure to electromagnetic fields
- EN IEC 62031** LED modules for general lighting - Safety specifications
- EN 61347-2-13** Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
- EN 61347-2-7** Lamp controlgear -- Part 2-7: Particular requirements for battery supplied electronic controlgear for emergency lighting (self-contained)
- EN 61347-1** Lamp controlgear - Part 1: General and safety requirements

Directiva RoHS 2011/65/EU y Directiva delegada (UE) 2015/863

Determinación de ciertas sustancias en productos electrotécnicos.

- IEC 62321-2-1 IEC 62321-5 IEC 62321-4
- IEC62321-6 IEC 62321-7-1 IEC 62321-7-2

