


565001PCW

LED FLOODLIGHT WITH BRACKET 50W 5700K

Floodlight LED with bracket and two Schuko sockets for outdoor use, 50W power and 5000lm luminous flux. Symmetrical 120° optical beam angle and 5700K color temperature. Protection rating against external elements IP54 and mechanical impact resistance rating IK10. Housing made of black and green PS and transparent PS lens.

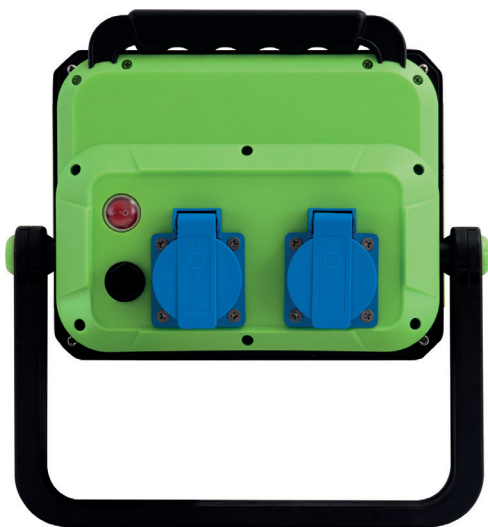

PRODUCT SPECIFICATIONS

Item code:	565001PCW
Description:	LED Floodlight for outdoor use
EAN13 code:	8436568444673

ELECTRICAL DATA

Power:	50W
Maximum Input Power:	3000W
Power factor:	0,9
Dimmable:	NOT
Connection cable:	Cable 1,5m 3x1,5mm
Schuko Socket:	2P+TT 16A IP54
Electrical insulation class:	Class I

LUMINOUS DATA

Color temperature:	5700K
Luminous efficiency:	100lm/w
Lumens:	5000lm
LED chip model:	SMD 5054
N.° LED chip:	56 pcs
Beam angle:	120°
Luminous distribution:	Symmetrical
Color rendering index:	>75

TECHNICAL DATA

Protection rating:	IP54 (Equipment protected against dust and water splashes)
Impact rating:	IK10 (20J)
Operating temperature:	-20°~50°
Mounting type:	Surface

AVERAGE LIFESPAN

Working hours:	30000 hrs
Switching cycles:	20000 ON/OFF

PHYSICAL DATA

Housing

Material:	PS
Finish:	Black and green


Diffuser

Material:	PS
Finish:	Transparent

Weight

Weight:	2,50 kg
---------	---------

DIMENSIONS

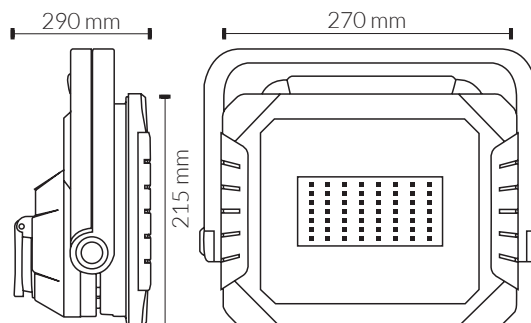

CERTIFICATIONS

