

565001RGB

RGB LED FLOODLIGHT 50W

Outdoor RGB LED floodlight, 50W power and 3750lm luminous flux. 120° symmetrical optical opening. IP65 protection rating against external elements and IK08 mechanical impact resistance rating. Black finish aluminium construction. Includes memory function. Configurable via the remote control supplied with the floodlight.



PRODUCT SPECIFICATIONS

Item code:	565001RGB
Description:	Outdoor LED floodlight
EAN13 code:	8436568445359

ELECTRICAL DATA

Power:	50w
Voltage:	220-240vac
Frequency:	50-60 Hz
Power factor:	0,9
Dimmable:	YES
Electrical insulation class:	CLASS I
Connection:	L/N+TT

LUMINOUS DATA

Color temperature:	RGB
Luminous efficiency:	75lm/w
Lumens:	3750lm
LED chip model:	SMD 2835
Beam angle:	120°
Luminous distribution:	Symmetrical
Standard desviation of colour matching:	<4
Luminous flux maintenance:	L90B10
Flicker index:	≤1,0
SVM (Stroboscopic Visibility Measure):	≤0,9

TECHNICAL DATA

Protection rating:	IP65 (Dust-tight equipment and protected against water jets)
Impact rating:	IK08 (5J)
Operating temperature:	-20°~50°
Mounting type:	Surface
Control system:	Remote control
Memory function:	YES

AVERAGE LIFESPAN

Working hours:	30000 hrs
Switching cycles:	20000 ON/OFF


PHYSICAL DATA

Housing	
Material:	Aluminum
Finish:	Black
Diffuser	
Material:	Glass
Finish:	Transparent
Weight	
Weight:	0,70 kg

ENERGY EFFICIENCY 2023(UE-2019/2015)

F

DIMENSIONS

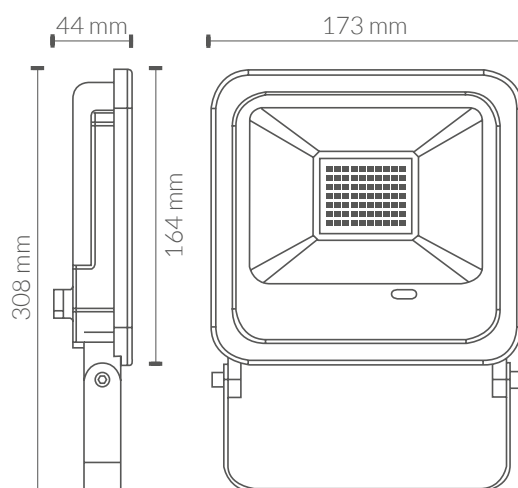

CERTIFICATIONS

