

## T8120CCT



## T8 TUBE 120CM 18W G13 CCT



### PRODUCT SPECIFICATIONS

|              |               |
|--------------|---------------|
| Item code:   | T8120CCT      |
| Description: | T8 LED tube   |
| Socket:      | G13           |
| EAN13 code:  | 8435724907106 |

### ELECTRICAL DATA

|               |            |
|---------------|------------|
| Power:        | 18w        |
| Voltage:      | 176/264vac |
| Frequency:    | 50/60Hz    |
| Power factor: | 0,5        |
| Dimmable:     | NOT        |

### LUMINOUS DATA

|   |                                       |
|---|---------------------------------------|
| Color temperature:                      | Selectable CCT: 5700K / 4000K / 3000K |
| Luminous efficiency:                    | 140 lm/w                              |
| Lumens:                                 | 2520m                                 |
| LED chip model:                         | SMD 2835                              |
| Beam angle:                             | 330°                                  |
| Color rendering index:                  | >80                                   |
| Standard desviation of colour matching: | <6                                    |
| Luminous maintenance factor:            | L96                                   |
| Flicker index:                          | ≤1                                    |
| SVM (Stroboscopic Visibility Measure):  | ≤0,4                                  |


### AVERAGE LIFESPAN

|                   |              |
|-------------------|--------------|
| Working hours:    | 50000 hrs    |
| Switching cycles: | 35000 ON/OFF |

### PHYSICAL DATA

|                  |               |
|------------------|---------------|
| Material:        | Glass         |
| Finish:          | Opal          |
| Socket material: | Thermoplastic |



## DIMENSIONS



## ENERGY EFFICIENCY 2023((UE-2019/2015)

F

## LUMINOUS INTENSITY DISTRIBUTION CURVE

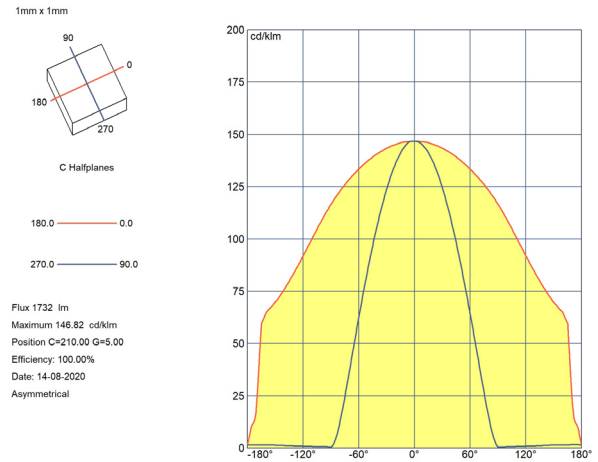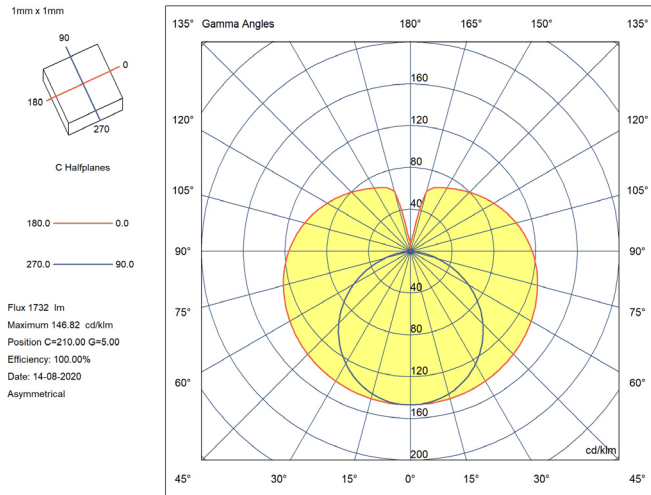

## CERTIFICATIONS

